

PLANT SCHEDULE

EVERGREEN TREES	CODE	BOTANICAL / COMMON NAME	SIZE	HEIGHT	QTY	REMARKS	
	IV	Ilex vomitoria / Yaupon Holly	10 gal.	4'-5'	8	Tree form	
FLOWERING TREES	CODE	BOTANICAL / COMMON NAME	SIZE	HEIGHT	QTY	REMARKS	
	CMS	Lagerstroemia indica 'Sioux' / Sioux Crepe Myrtle	2"-2.5"	6'-8'	2	Nursery Grown; Multi-Trunk-Min. 4" Full Rounded Head	
	CT	Vitex agnus-castus 'Shoal Creek' / Shoal Creek Vitex	2"-2.5"	6'-7'	3	Nursery Grown; Multi-Trunk-Min. 4" Full Rounded Head	
SHRUBS	CODE	BOTANICAL / COMMON NAME	SIZE	HEIGHT	QTY	REMARKS	
	JF	Juniperus chinensis 'Sea Green' / Sea Green Juniper	5 gal.	18"	7	FULL	
	GSN	Nandina domestica 'Gulf Stream' / Gulfstream Nandina	5 gal	15"	24	FULL	
TURFS	CODE	BOTANICAL / COMMON NAME	SIZE	HEIGHT	QTY	REMARKS	
	BBL	Liriope muscari 'Big Blue' / Big Blue Lilyturf	4"pot		734		
GROUND COVERS	CODE	BOTANICAL / COMMON NAME	SIZE	HEIGHT	SPACING	QTY	REMARKS
	STE	Stenotaphrum secundatum 'Palmetto' / Palmetto St. Augustine Grass	sod			1,769 sf	
	AJ	Trachelospermum asiaticum / Asiatic Jasmine	4"pot		12" o.c.	792	Full; Space on 12" Center, Min. 4 Runners; Ea. 5" Long

ARCHITECTURE
 SCOTT MARTSOLF - ARCHITECT

815 Daggett Avenue
 Fort Worth, Texas 76104
 Phone: (817) 820-0005

ST. JUDE CATHOLIC CHURCH
 PARISH HALL REMODEL & CONNECTOR

500 E DALLAS ST.
 MANSFIELD, TX 76063

PLANT LEGEND


TREES	COMMON NAME
IV	Yaupon Holly (Tree Form)
CMS	Sioux Crepe Myrtle
CT	Shoal Creek Vitex
SHRUBS	COMMON NAME
JF	Sea Green Juniper
GSN	Gulf Stream Nandina
TURF	COMMON NAME
BBL	Big Blue Lilyturf
GROUND COVERS	COMMON NAME
STE	St. Augustine Grass sod
AJ	Asiatic Jasmine

*All Large and Ornamental Trees must be on bubbler / drip irrigation on separate zones from turf grasses.

NOTE:
 All new landscaped areas shall be watered by an automatic underground irrigation system equipped with rain and freeze sensors. System shall be designed by a Texas Licensed Irrigator, and installed by a Texas Licensed Irrigation Installer. Design and installation shall conform to all current and applicable Texas Commission on Environmental Quality (TCEQ) requirements.



WARNING TO CONTRACTOR
 CALL 1-800-344-8377 (TEXAS 811) OR OTHER UTILITY LOCATION SERVICES 48 HOURS PRIOR TO CONSTRUCTION ACTIVITY. BAIRD HAMPTON AND BROWN, INC. IS NOT RESPONSIBLE FOR KNOWING ALL EXISTING UTILITIES OR DEPICTING EXACT LOCATIONS ON ALL DRAWINGS.

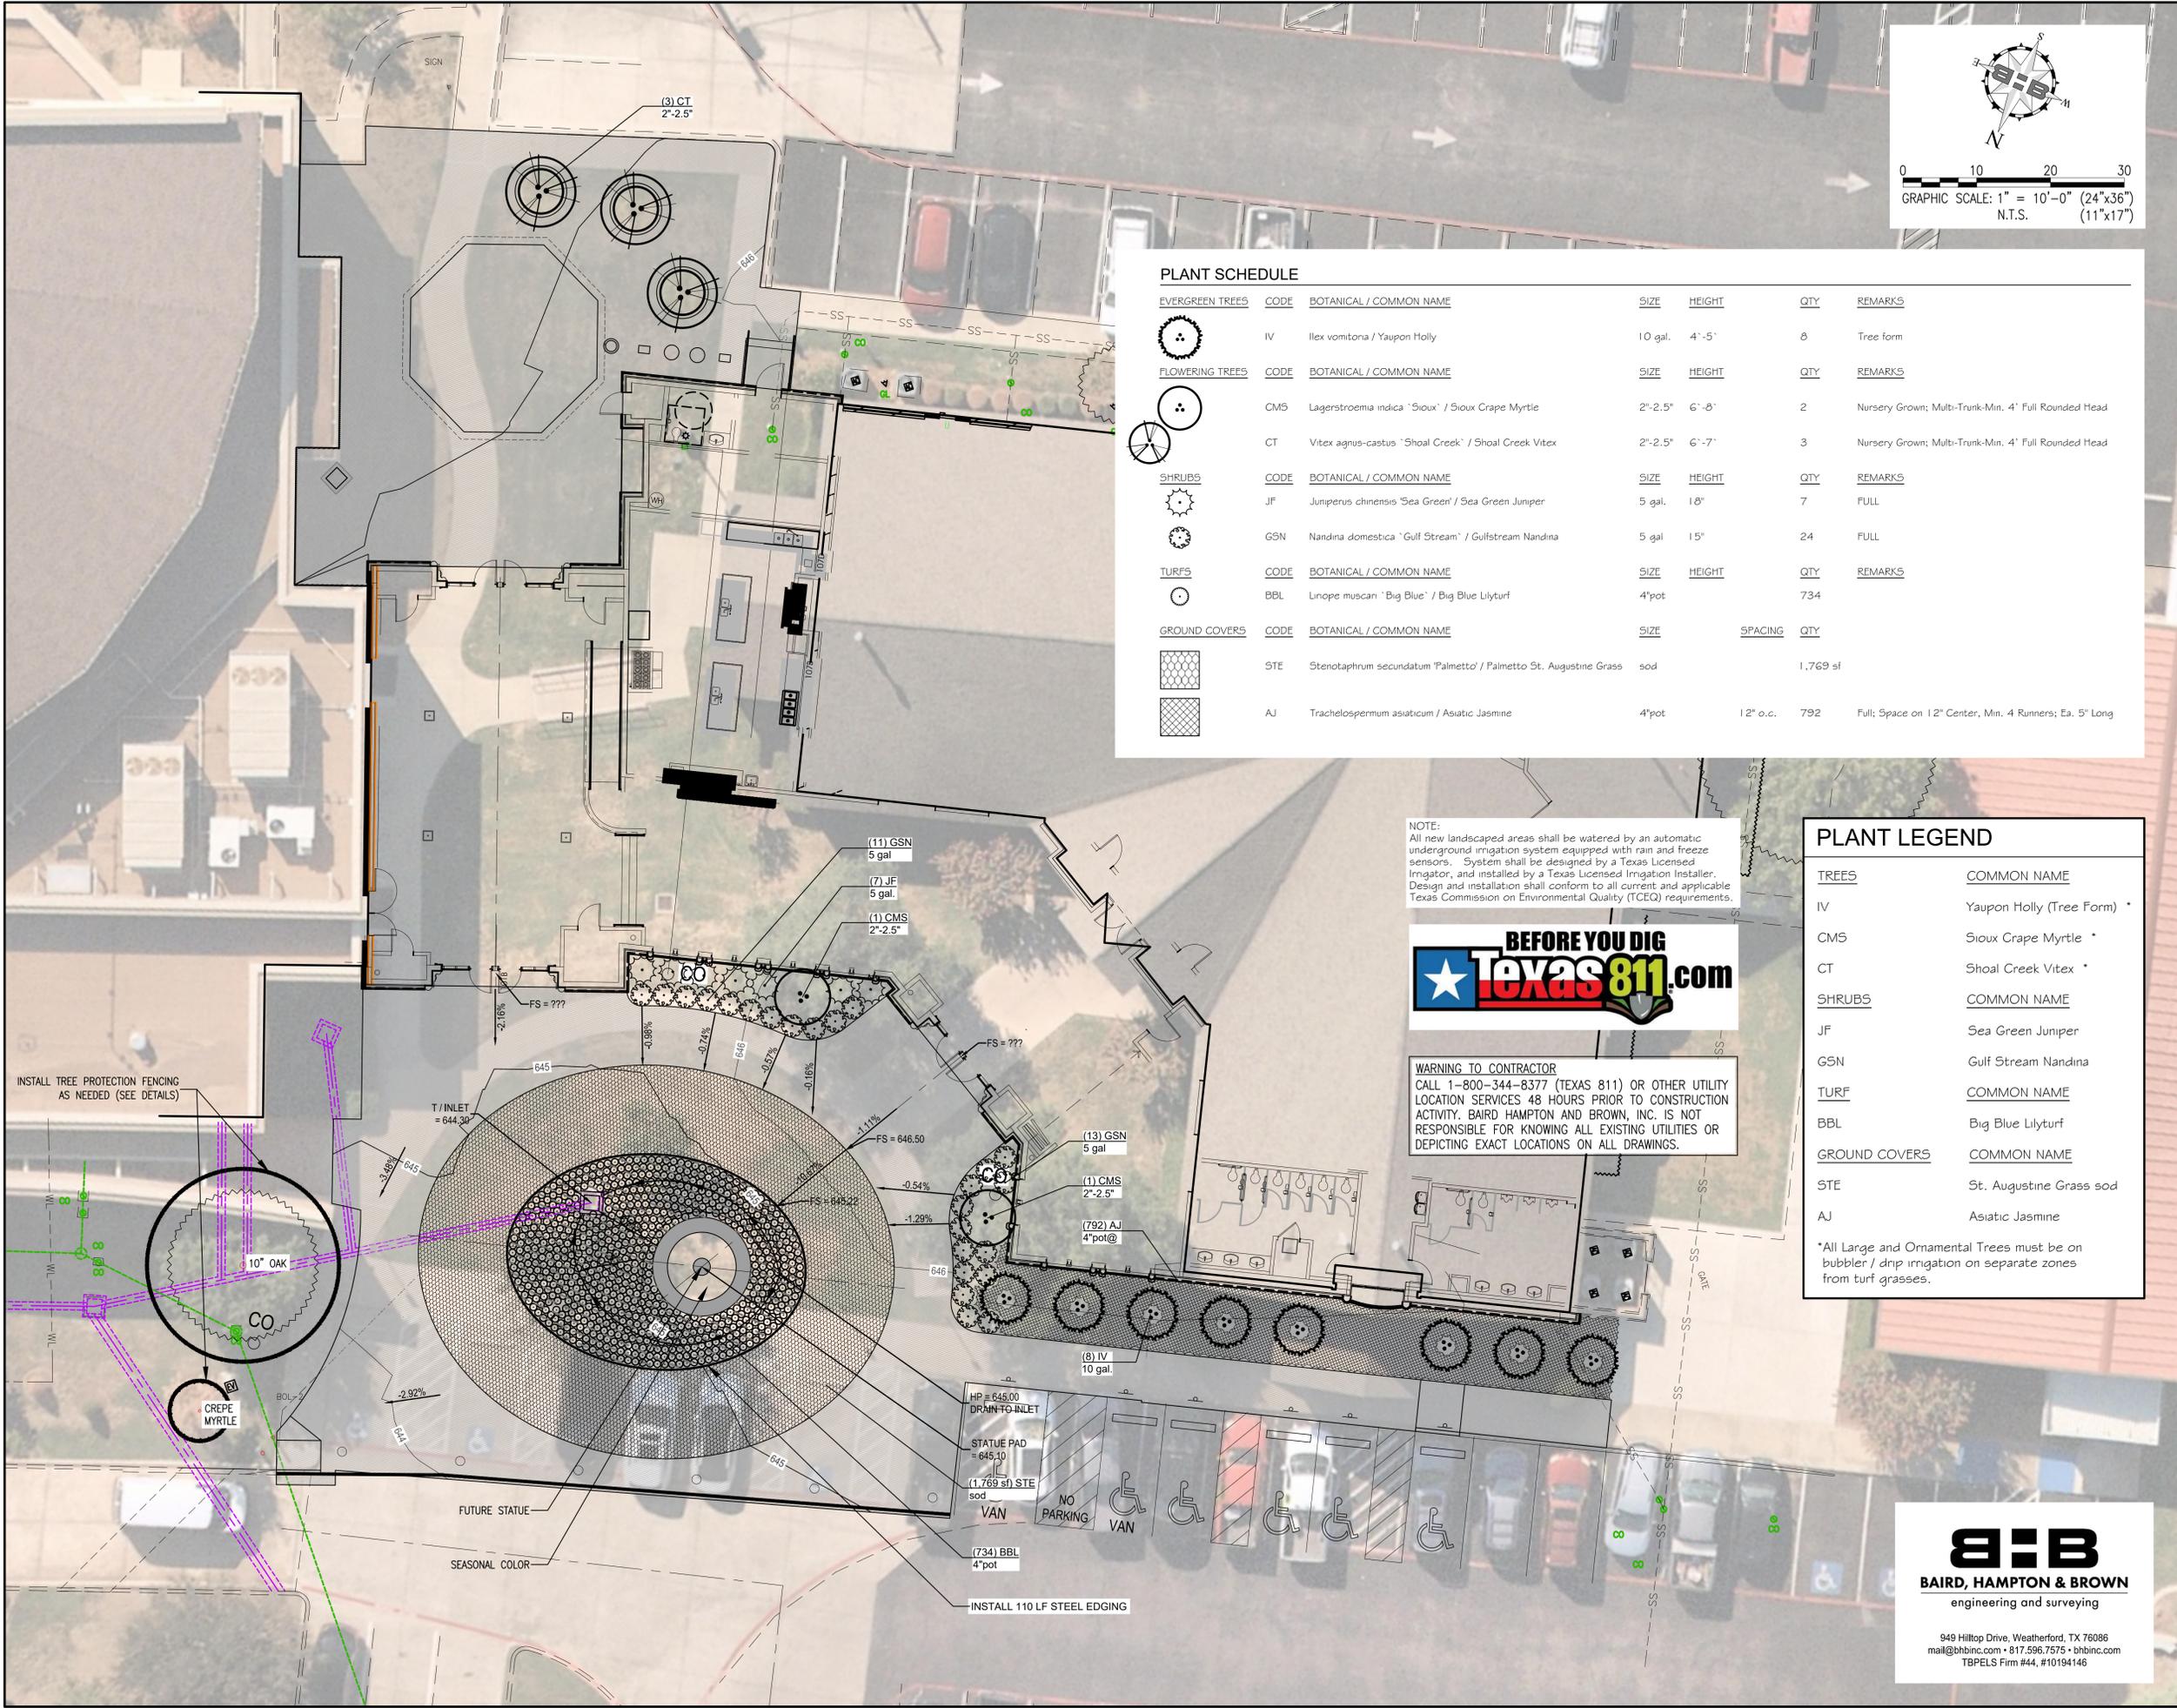

INSTALL TREE PROTECTION FENCING AS NEEDED (SEE DETAILS)

HP = 645.00
 DRAIN-TO-INLET
 STATUE PAD = 645.10
 (1,769 sf) STE sod
 VAN

(734) BBL 4"pot

INSTALL 110 LF STEEL EDGING

BHB
BAIRD, HAMPTON & BROWN
 engineering and surveying
 949 Hilltop Drive, Weatherford, TX 76086
 mail@bhinc.com • 817.596.7575 • bhinc.com
 TBPELS Firm #44, #10194146

PERMIT SET

Drawing Title:
 LANDSCAPE PLAN

Project No. 2307	Date: 1/12/2024
Sheet No. LS03	

REGISTERED LANDSCAPE ARCHITECT
 PARIS SAMUELS
 3750
 STATE OF TEXAS
 Jan 16, 2024