

ARCHITECTURE
SCOTT MARTSOLF - ARCHITECT

815 Doggett Avenue
Fort Worth, Texas 76104
Phone: (817) 820-0005

**ST. JUDE
CATHOLIC
CHURCH**

**PARISH HALL
REMODEL &
CONNECTOR**

500 E DALLAS ST.
MANSFIELD, TX 76063

PERMIT SET

Drawing Title:


PARTIAL FLOOR -
HVAC DEMOLITION PLAN

Project No.
2307

Date:
1/12/2024

Sheet No.

M1.1

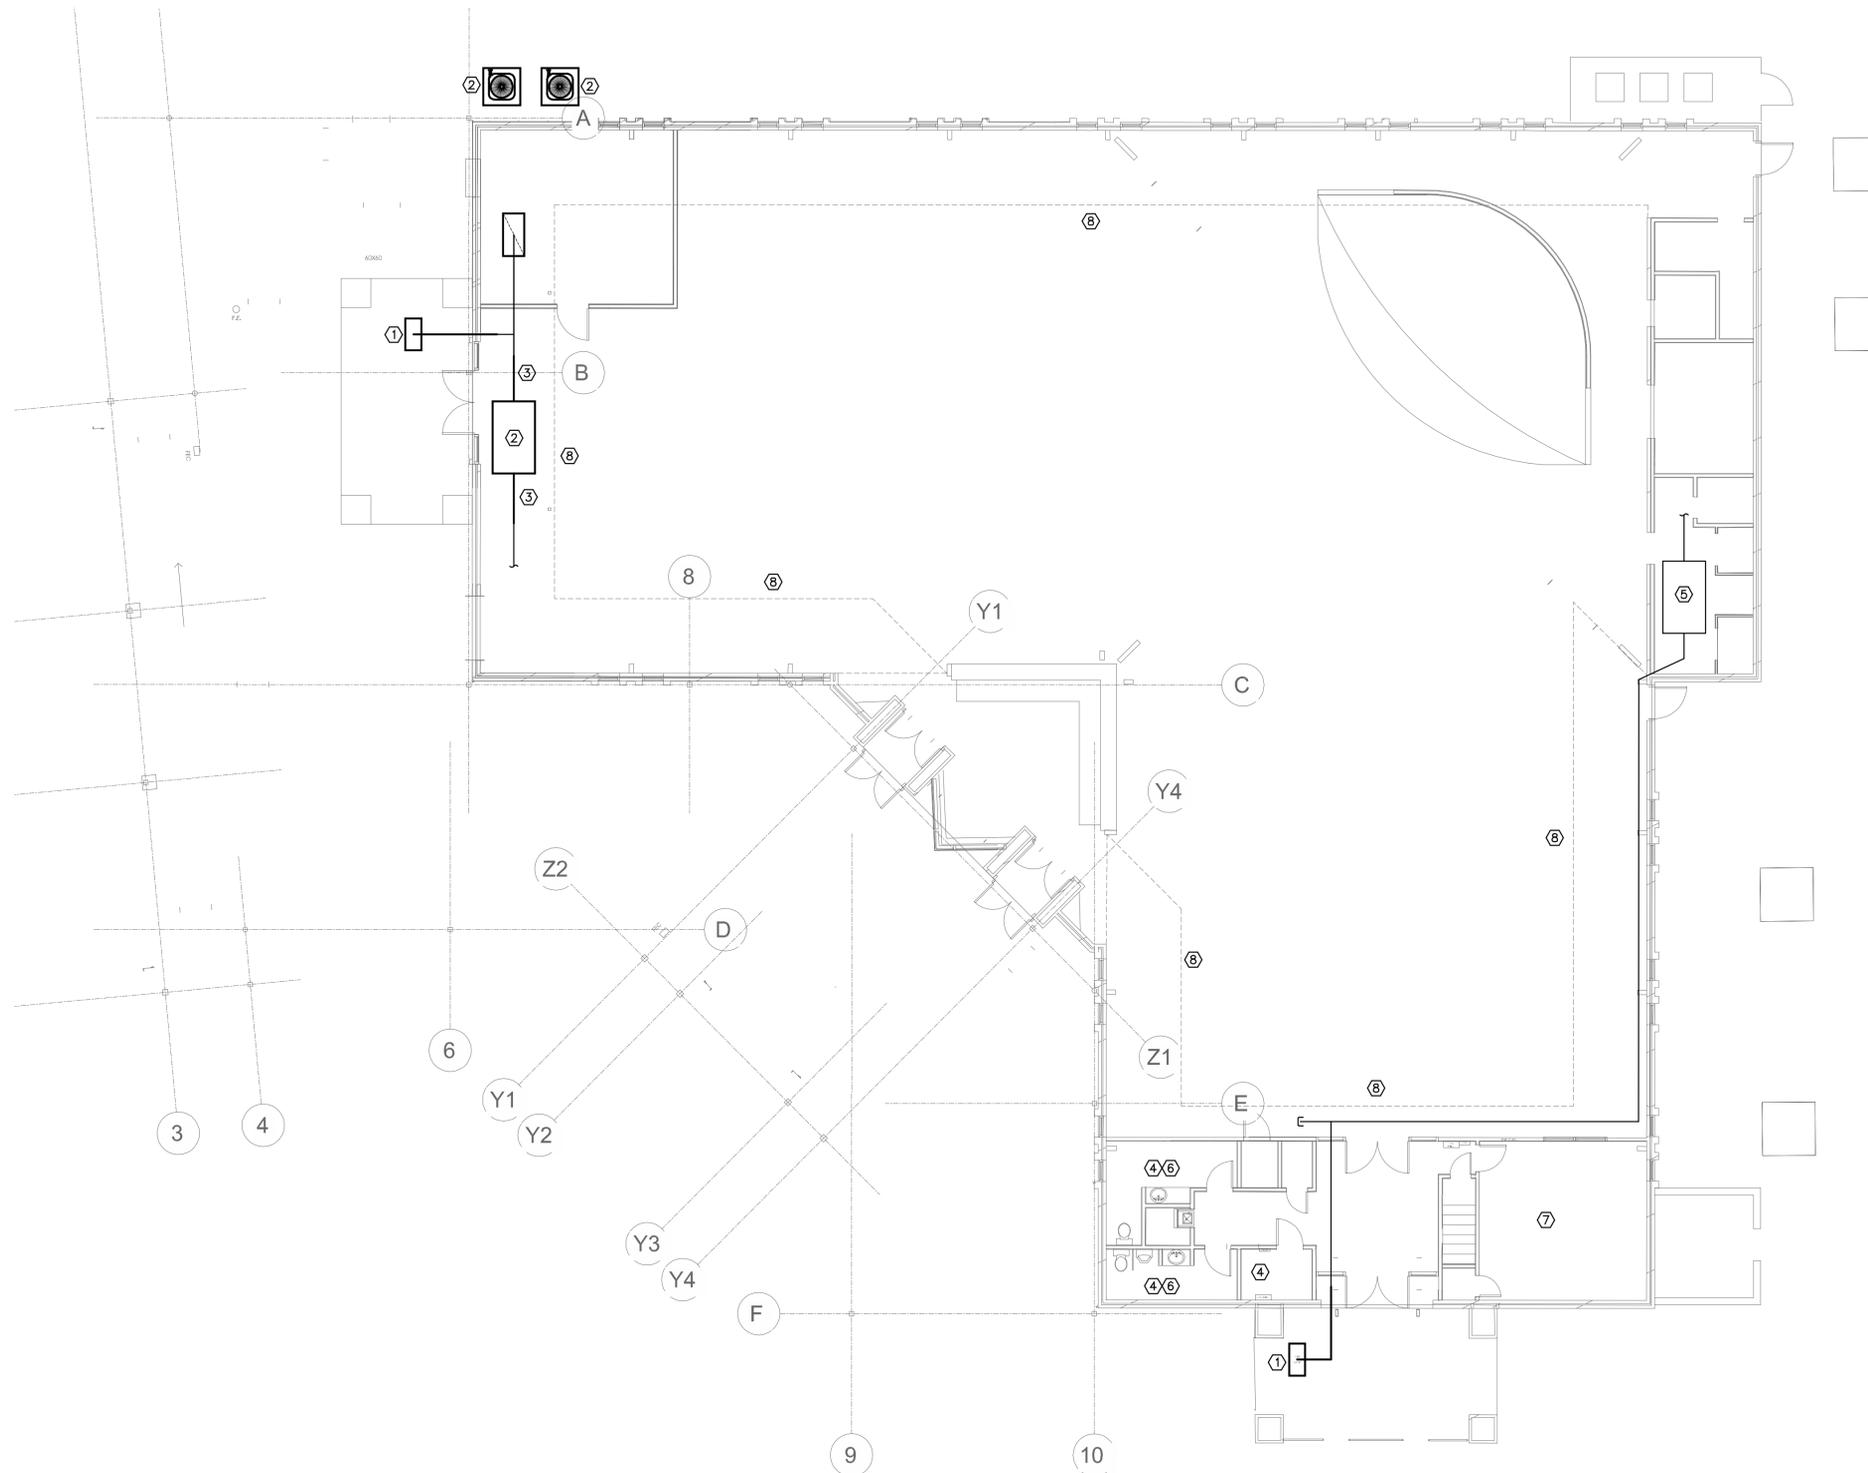

1 PARTIAL FLOOR - HVAC PLAN

Scale: 1/8" = 1'-0"

NOTES BY SYMBOL "A"


- (6) TAKE AIR FLOW READINGS ON SUPPLY AIR DEVICES IN THIS ROOM AND RECORD FOR REFERENCE AT REMODEL PHASE. DEMOLISH SUPPLY AIR DEVICES AND CONNECTING RUN-OUT DUCT ALONG WITH ASSOCIATED FITTINGS AND ACCESSORIES TO POINT OF CONNECTION AT BRANCH MAIN AND CAP WITH SAME MATERIAL AS EXISTING.
- (7) TAKE AIR FLOW READINGS ON SUPPLY AIR DEVICE IN THIS ROOM AND RETAIN FOR REMODEL PHASE. DEMOLISH SUPPLY AIR DEVICES, BUT RETAIN RUN-OUT DUCT FOR RECONNECTION AT REMODEL PHASE. DEMOLISH RETURN AIR AND CONNECTING RUN-OUT DUCT ALONG WITH ASSOCIATED FITTINGS AND ACCESSORIES TO POINT OF CONNECTION AT BRANCH MAIN AND CAP WITH SAME MATERIAL AS EXISTING.
- (8) PRIOR TO REMOVING, TAKE AIR FLOW READINGS AT EXISTING SUPPLY AIR DEVICES AND RECORD FOR USE AT REMODEL PHASE. REMOVE AND STORE EXISTING AIR DEVICES FOR RE-INSTALLATION AT REMODEL PHASE. TEMPORARILY CAP RUN-OUT DUCT FOR RE-CONNECTION AT REMODEL PHASE.

NOTES BY SYMBOL "B"

- (1) RECORD DIMENSIONS OF EXISTING OUTDOOR AIR INTAKE (FACE AREA) THEN DEMOLISH EXISTING OUTDOOR AIR INTAKE GRILLE AND ASSOCIATED FITTINGS AND ACCESSORIES. DEMOLISH OUTDOOR AIR DUCT AND ASSOCIATED FITTINGS AND ACCESSORIES AS SHOWN.
- (2) DEMOLISH EXISTING SPLIT SYSTEM, GAS HEATER, CONDENSING UNITS AND ASSOCIATED PIPING, WIRING, FITTINGS AND ACCESSORIES. DEMOLISH GAS PIPING BETWEEN UNIT AS GAS COOK ALONG WITH ASSOCIATED FITTINGS AND ACCESSORIES. TEMPORARILY CAP GAS LINE, LEAK-TIGHT. GAS LINE WILL BE EXTENDED AT REMODEL PHASE. REFER TO PLUMBING DRAWINGS FOR ADDITIONAL INSTRUCTIONS.
- (3) DEMOLISH SUPPLY AND RETURN AIR DUCT AS SHOWN.
- (4) DEMOLISH EXISTING EXHAUST SYSTEM SERVING EXISTING RESTROOMS AND ELECTRICAL CLOSET, COMPLETE, INCLUDING FAN, EXHAUST DUCT, AIR DEVICES, CONTROLS, WIRING, AND ASSOCIATED FITTINGS AND ACCESSORIES.
- (5) EXISTING SPLIT SYSTEM IN ATTIC TO REMAIN. PROTECT FROM DAMAGE THROUGH ALL PHASES OF CONSTRUCTION.

GENERAL NOTES THIS SHEET

1. REFER TO NOTES ON M0.1 FOR ADDITIONAL INSTRUCTIONS.
2. WORK SHOWN IS FROM AVAILABLE AS-DESIGNED DOCUMENTS AND LIMITED SITE OBSERVATIONS. VERIFY ALL WORK PRIOR TO COMMENCING ANY HVAC WORK.



MEP Consultant
Rene A. Culross
Rene A. Culross, P.E., PLLC
1820 Hunting Green Drive
Fort Worth, TX 76134
817-798-6642
raculross@gmail.com
F-12230