

ARCHITECTURE
SCOTT MARTSOLF - ARCHITECT

815 Daggett Avenue
Fort Worth, Texas 76104
Phone: (817) 820-0005

**ST. JUDE
CATHOLIC
CHURCH
PARISH HALL
REMODEL &
CONNECTOR**

500 E DALLAS ST.
MANSFIELD, TX 76063

12/29/23 ADDENDUM #1

PERMIT SET

Drawing Title:

PARTIAL FLOOR -
DEMOLITION PLAN

Project No.
2307

Date:
1/12/2024

Sheet No.

E1.1

GENERAL NOTES

- RE: E0.1 FOR ELECTRICAL SYMBOLS, ADDITIONAL GENERAL NOTES, AND ABBREVIATIONS.
- RE: E0.2 FOR ELECTRICAL SPECIFICATIONS.
- RE: E0.3 FOR LIGHTING CONTROL DETAILS.
- RE: E5.1 FOR BRANCH WIRING SCHEDULE FOR WIRE SIZES.
- RE: E6.1 OR PANELBOARD SCHEDULES.
- RE: E6.2 FOR LIGHT FIXTURE SCHEDULE.
- RE: E6.2 FOR MECHANICAL / ELECTRICAL SCHEDULE.
- LIGHTING CONTROLS TO INCLUDE "DAYLIGHTING ZONE" REQUIREMENTS.
- PROVIDE ADDITIONAL CONDUCTOR WITHIN CIRCUITS WHERE REQUIRED FOR UNSWITCHED POWER TO EXIT SIGNS AND EMERGENCY BALLAST / DRIVER SYSTEMS.
- DESIGNATION REPRESENTS:
(E) EXISTING ELECTRICAL DEVICE TO REMAIN AS IS.
(R) EXISTING ELECTRICAL DEVICE TO TO BE REMOVED IN ITS ENTIRETY.
(RR) REMOVE AND RELOCATED EXISTING ELECTRICAL DEVICE.
(NL) NEW LOCATION FOR EXISTING RELOCATED ELECTRICAL DEVICE.
CCT EXISTING LIGHTING BRANCH CIRCUITING TO BE RE-USED FOR NEW LIGHT FIXTURES.

NOTES BY SYMBOL "#"


- EXISTING PANEL IS NOT LABELED. FOR DRAWING PURPOSES THIS EXISTING PANEL WILL BE IDENTIFIED AS "A".
- EXISTING PANEL IS NOT LABELED. FOR DRAWING PURPOSES THIS EXISTING PANEL WILL BE IDENTIFIED AS "B".
- NO ELECTRICAL WORK REQUIRED IN THIS ROOM. MAINTAIN LIGHTING AND POWER BRANCHING CIRCUITING CONTINUITY. EXISTING SWITCH TO REMAIN AS IS AND MAINTAIN SWITCHING CONFIGURATION. UNLESS NOTED OTHERWISE.
- CONTRACTOR TO TRACE ALL EXISTING LIGHTING AND BRANCH CIRCUITING TO DETERMINE WHICH CIRCUIT WILL BE RE-USED AND WHICH WILL BECOME "SPARES". PROVIDE NEW UPDATED PANELBOARD DIRECTORIES ONCE RENOVATION IS COMPLETED.
- EXISTING EXTERIOR RECEPTACLES LOCATED ON THE EXISTING EXTERIOR WALLS ARE TO REMAIN AS IS. MAINTAIN EXISTING POWER BRANCH CIRCUITING.
- EXISTING LIGHT FIXTURES DESIGNATED WITH (R) LTG WITHIN THE IS DASHED AREA ARE TO BE DISCONNECTED AND REMOVED IN ITS ENTIRETY. TURN LIGHT FIXTURES OVER TO THE OWNER FOR THEIR DISPOSAL.
- EXISTING LIGHTING BRANCH CIRCUITING DESIGNATED WITH (E) CCT WITHIN THE DASHED AREA IS TO REMAIN AS IS. MAKE SAFE FOR RE-USE. RE: 1/E2.1 PARTIAL FLOOR - LIGHTING PLAN FOR ADDITIONAL INFORMATION.
- EXISTING INTERIOR RECEPTACLES LOCATED ON THE EXISTING EXTERIOR WALLS ARE TO REMAIN AS IS. MAINTAIN EXISTING POWER BRANCH CIRCUITING.
- EXISTING DATA OUTLETS LOCATED ON THE EXISTING EXTERIOR WALLS ARE TO REMAIN AS IS. MAINTAIN EXISTING COMMUNICATION CABLING CONTINUITY.
- EXISTING MECHANICAL UNITS (AHU'S AND CONDENSING UNITS) ARE EXISTING TO REMAIN AS IS UNLESS NOTES OTHERWISE. EXISTING POWER BRANCH CIRCUITING TO REMAIN AS IS AND MAINTAIN EXISTING POWER BRANCH CIRCUITING CONTINUITY.
- EXISTING FIRE ALARM DEVICE(S) LOCATED WITHIN THE DASHED AREA ARE EXISTING TO REMAIN AS IS. EXISTING MAINTAIN FIRE ALARM CONTINUITY BACK TO EXISTING CONTROL PANEL(S). EXISTING FIRE ALARM CONTROL PANEL(S) ARE TO BE DISCONNECTED AND RELOCATED. DISCONNECT AND MAKE SAFE THE EXISTING POWER BRANCH CIRCUITING (FIELD TRACE CCT B-11) TO BE RE-USED. RE: 1/E3.1 PARTIAL FLOOR - POWER AND DATA PLAN FOR ADDITIONAL INFORMATION.
- EXISTING TRACK LIGHTING IS TO BE DISCONNECTED AND RELOCATED. EXISTING LIGHTING BRANCH CIRCUITING TO BE MADE SAFE FOR FUTURE USE. RE: E2.1 PARTIAL FLOOR - LIGHTING PLAN FOR ADDITIONAL INFORMATION.
- EXISTING LIGHT SWITCHES (TOTAL OF 27) ARE TO REMAIN AS IS. MAINTAIN CIRCUITING CONTINUITY AND SWITCHING CONFIGURATION.
- EXISTING CEILING MOUNTED PROJECTOR TO REMAIN AS IS. MAINTAIN CIRCUITING CONTINUITY.
- EXISTING HAND DRYER TO BE DISCONNECTED AND RELOCATED. DISCONNECT AND MAKE SAFE THE EXISTING POWER BRANCH CIRCUITING (FIELD TRACE CCT B-25) TO BE RE-USED. RE: 1/E3.1 PARTIAL FLOOR - POWER AND DATA PLAN FOR ADDITIONAL INFORMATION.

NOTES BY SYMBOL "#" CONT.


- EXISTING EXTERIOR LIGHT TO BE DISCONNECTED IN ITS ENTIRETY. DISCONNECT AND REMOVE EXISTING LIGHTING BRANCH CIRCUITING BACK TO ORIGIN (EXISTING EXTERIOR LIGHTING BRANCH CIRCUITING JUNCTION FEEDING OTHER EXTERIOR LIGHT FIXTURE REMAINING OR LIGHTING CONTROLS OR PANELBOARD).
- EXISTING SURFACE MOUNTED RECEPTACLES ARE TO BE DISCONNECTED AND REMOVED. EXISTING EXPOSED CONDUIT AND ASSOCIATED CONDUCTORS ARE TO BE DISCONNECTED AND REMOVED BACK TO POINT OF ORIGIN (PANELBOARD).

NOTES BY SYMBOL "#" CONT.

- EXISTING ELECTRICAL WATER COOLER TO BE DISCONNECTED AND RELOCATED. DISCONNECT AND MAKE SAFE THE EXISTING POWER BRANCH CIRCUITING (FIELD TRACE CCT B-11) TO BE RE-USED. RE: 1/E3.1 PARTIAL FLOOR - POWER AND DATA PLAN FOR ADDITIONAL INFORMATION.
- EXISTING AIR HANDLER UNIT IS SCHEDULED FOR DEMOLITION. DISCONNECT, REMOVE EXISTING LOCAL DISCONNECTING MEANS, CONDUIT AND ASSOCIATED CONDUCTORS BACK TO THE POINT OF ORIGIN. LABEL EXISTING CIRCUIT BREAKER AS "SPARE".
- EXISTING CONDENSING UNITS (2 TOTAL) IS SCHEDULED FOR DEMOLITION. DISCONNECT, REMOVE EXISTING LOCAL DISCONNECTING MEANS, CONDUIT AND ASSOCIATED CONDUCTORS BACK TO THE POINT OF ORIGIN. LABEL EXISTING CIRCUIT BREAKER AS "SPARE".

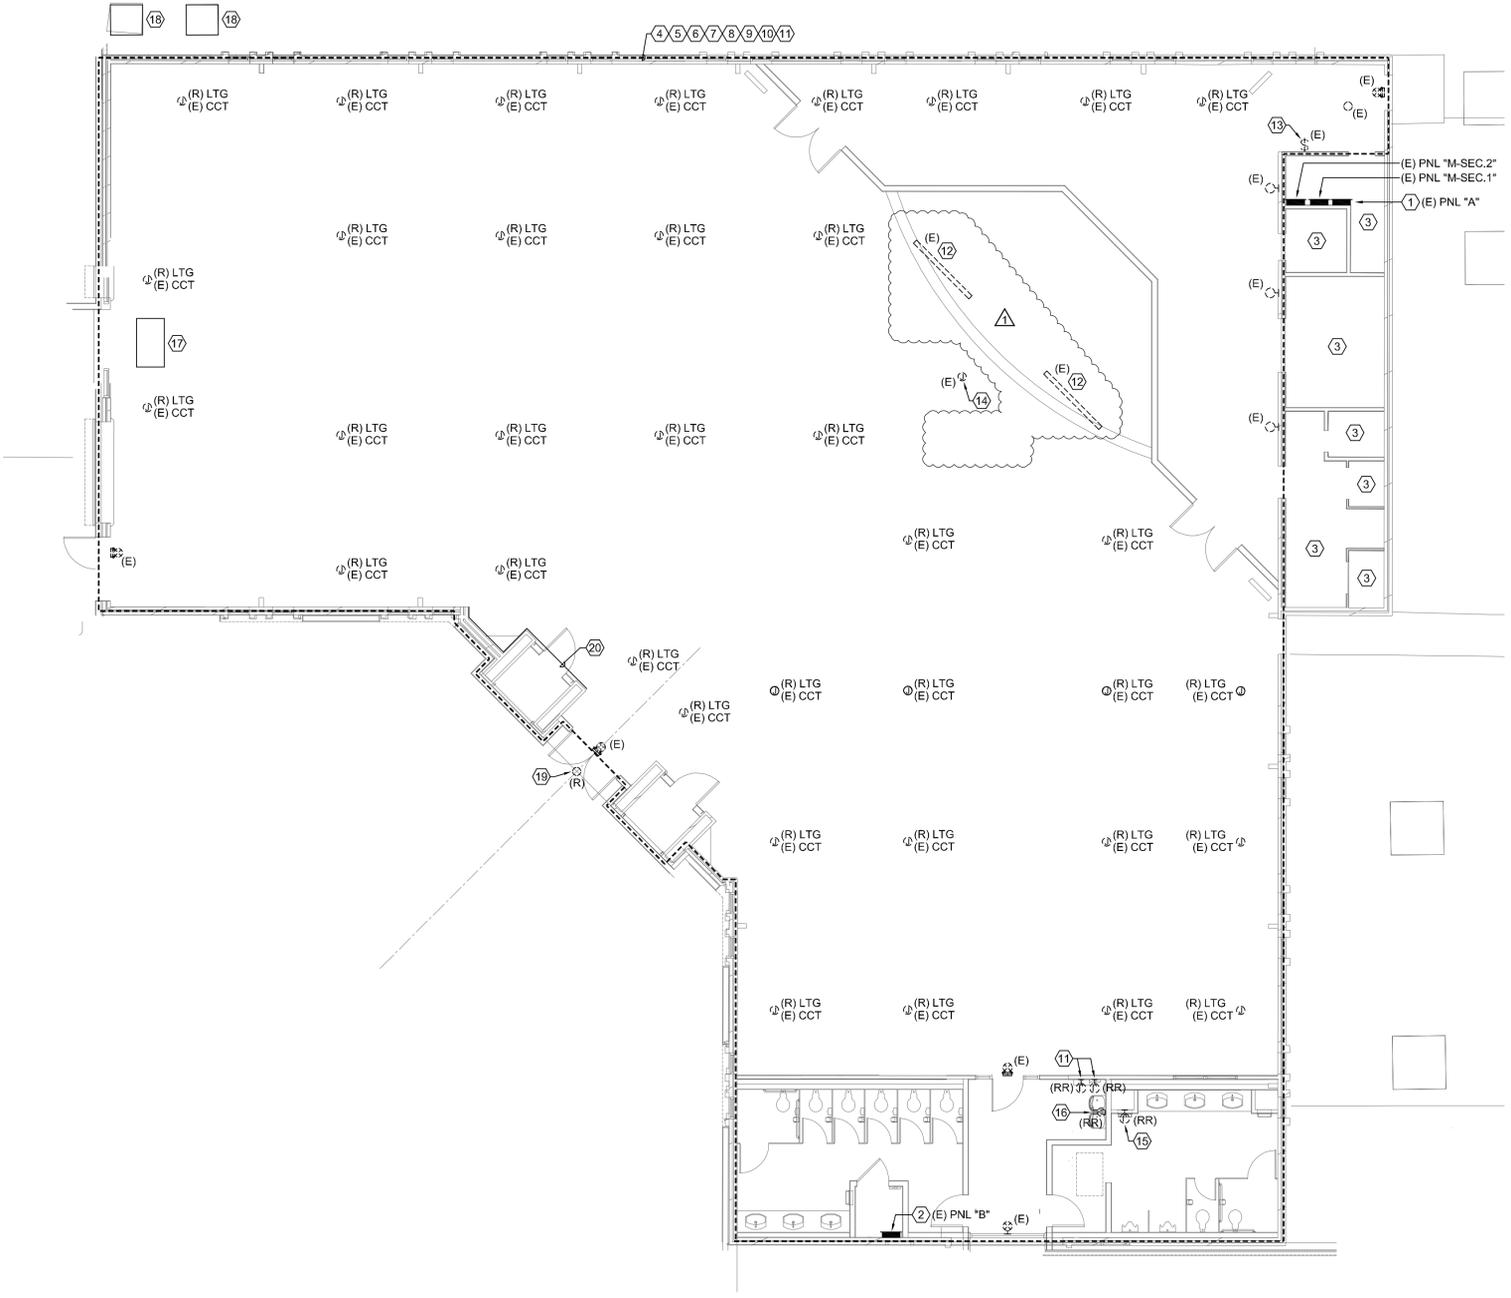

PARTIAL FLOOR - DEMOLITION PLAN
Scale: 1/8" = 1'-0"



MEP Consultant
Rene A. Culross
Rene A. Culross, P.E., PLLC
1820 Hunting Green Drive
Fort Worth, TX 76134
817-798-6642
raculross@gmail.com
F-12230